




6. Connect the power cord at the bottom of the enclosure to the connector at the top of the enclosure.

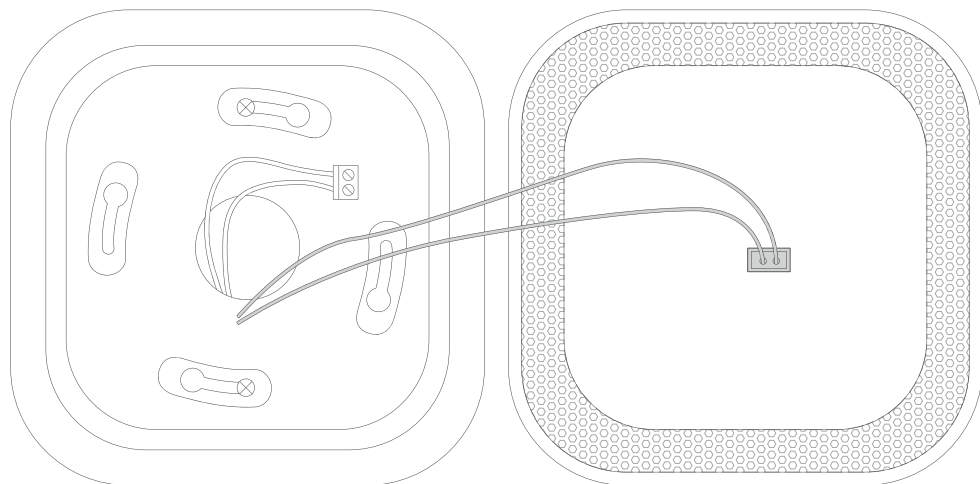


7. Push the lid of the enclosure into the mounted part of the enclosure. The device is on.

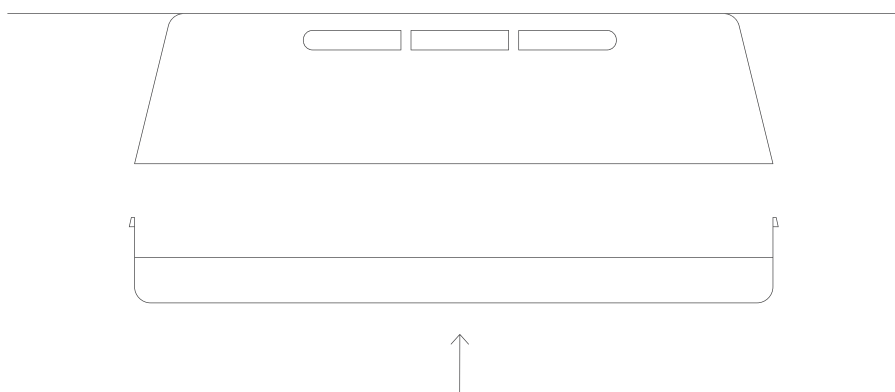

1. Open the enclosure by pressing on the two clasps on both sides at the same time.

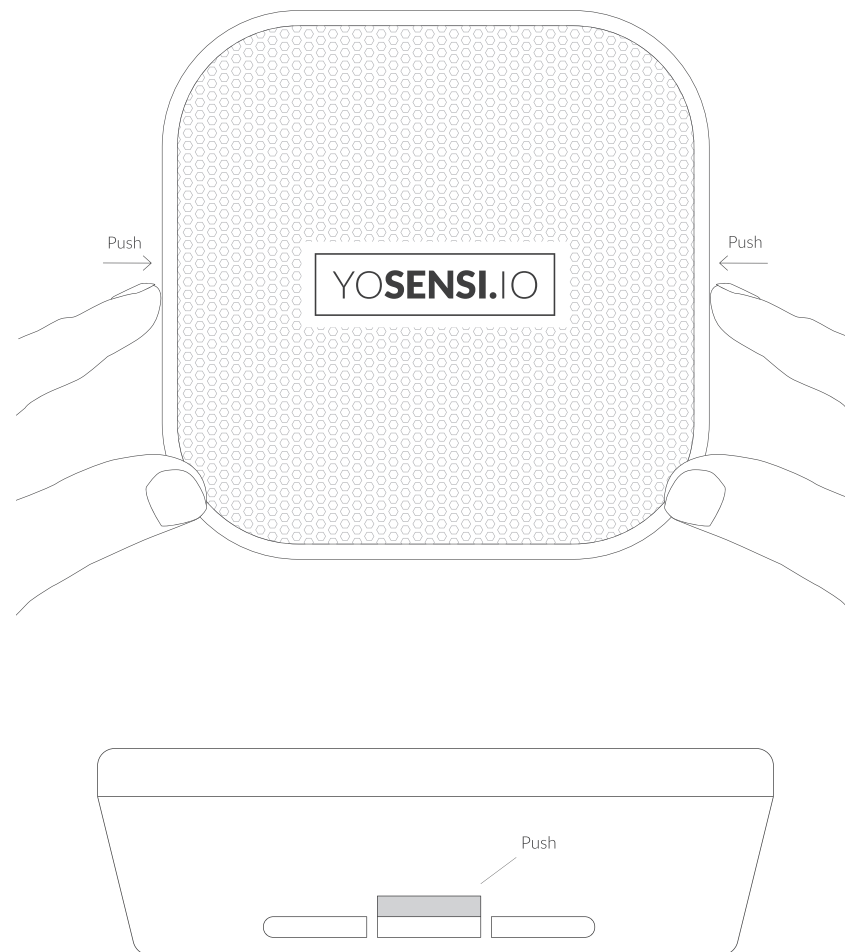


2. Place the bottom part of the enclosure where you want to mount the device. Mark spots for two mounting screws.

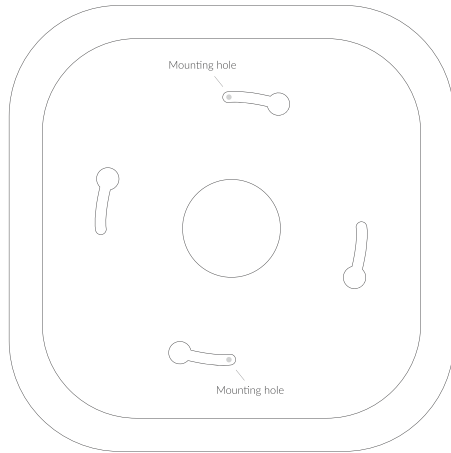

3. Drill the holes and position (screw in) the two screws where you marked the spots.

4. Mount the lower part of the enclosure on the two mounting screws as shown in the image below:

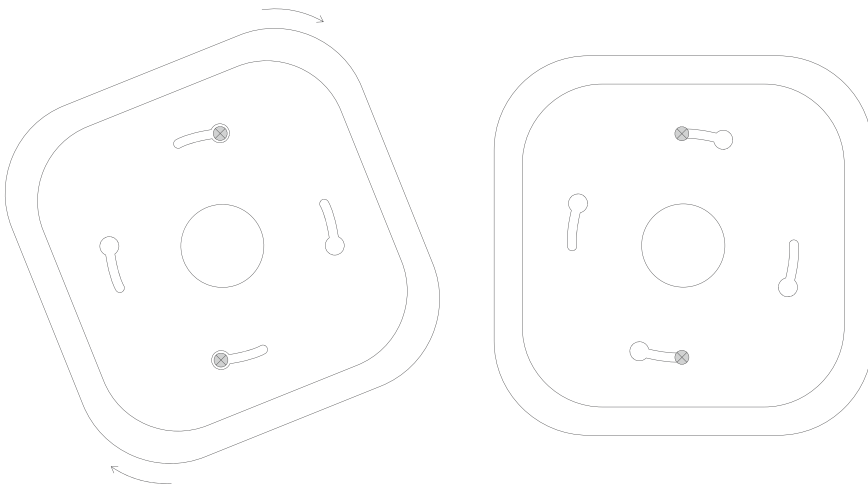

5. Insert the power cord through the hole in the bottom part (image A) and connect power supply to the connector on the PCB board (100~240V AC 50/60Hz) - image B.

